

## Диафрагменные клапаны серии В, ВG



**Архангельск** (8182)63-90-72  
**Астана** (7172)727-132  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89  
**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Казань** (843)206-01-48

**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Липецк** (4742)52-20-81  
**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81

**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Пермь** (342)205-81-47  
**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54

**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Тверь** (4822)63-31-35  
**Томск** (3822)98-41-53  
**Тула** (4872)74-02-29  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Ярославль** (4852)69-52-93

**Киргизия** (996)312-96-26-47

**Казахстан** (772)734-952-31

**Таджикистан** (992)427-82-92-69

## ERHARD Diaphragm Valves, Weir Type “B” straight pattern, to DIN 3359-B1 or B3<sup>4)</sup>

of ductile cast iron or rubber-coated ductile cast iron

### Range of application

Size DN	Pressure rating PN	Hydrost. test pressure <sup>6)</sup> in bars for		Max. adm. working pressure in bars at a working temperature of max. + 120 °C <sup>5)</sup>
		body water	seat water	
15 - 150	10	17	11	10
200 - 250	6	12	6,6	6
300	4	6	4,4	4

When placing the order, please specify flow medium, working pressure, and working temperature. Specify if vacuum service is required.

**Flanges B**, DN 15 - 150, PN 16, GI, type 21, connecting dimensions and thickness to EN 1092-2<sup>1)</sup>.  
**B**, DN 200 - 300, PN 10, GI, type 21, connecting dimensions and thickness to EN 1092-2.

### Materials/Equipment

Prod. No.	7300 0773	7300 1673
Body	Ductile cast iron EN-JS1030 <sup>7)</sup>	Ductile cast iron EN-JS1030 <sup>7)</sup> with hard-rubber coating
Bonnet	Ductile cast iron EN-JS1030 <sup>7)</sup>	Ductile cast iron EN-JS1030 <sup>7)</sup>
Diaphragm	Grade according to working conditions <sup>2)</sup>	Grade according to working conditions <sup>2)</sup>
Stem	Ferritic chrome steel	Ferritic chrome steel
Threaded bush	Brass	Brass
Connecting bolts	Steel	Steel
Handwheel	Cast iron	Cast iron
Corrosion protection	Prime coat: chlorine-free caoutchouc derivative with modified alkyd resin Additionally external: synthetic resin varnish, sky blue, RAL 5015	

### Features


Straight pattern, without stuffing-box, absolutely leaktight, with rising stem and non-rising handwheel. The valve is closed by turning the handwheel in clockwise direction. The travel stop is also serving as indicating device. Provided with grease nipple for lubrication of threaded bush and stem. Diaphragm can be replaced without removing the valve from the pipeline.

### Dimensions

Size DN	Face-to-face dimension L <sup>8)</sup> mm	Height (approx.) H mm	Flange dia. D mm	Handwheel dia. d mm	Weight <sup>3)</sup> approx. kg
15	130	110	95	120	2,5
20	150	110	105	120	3,0
25	160	115	115	120	3,0
32	180	145	140	120	6,5
40	200	145	150	120	7,0
50	230	175	165	140	11
65	290	215	185	160	16
80	310	250	200	200	22
100	350	310	220	250	33
125	400	370	250	320	50
150	480	410	285	400	72
200	600	560	340	500	150
250	730	690	395	500	205
300	850	780	445	630	295

When Diaphragm Valves in hot water plants are subject to temperature changes at long intervals, the user has to reckon with slacking of the elastomer diaphragm where it is clamped between body and bonnet. Retensioning of the bonnet bolts could become necessary. If such plants are equipped with insulation against loss of heat, we recommend to install ERHARD ECLS Butterfly Valves.

**Warning note:** When using flow media endangering the environment and detrimental to health, pay attention to the relevant legal rules and regulations as well as to the regulations for prevention of accidents, AD prints, DVGW regulations, and similar. Moreover, valve design with safety sealing device, e. g. Prod. No. 7300 0772, has to be chosen for such media, so that the medium cannot penetrate to the outside when the diaphragm breaks.



- <sup>1)</sup> For DN 80 please specify if the flanges are to be drilled with 4 or 8 holes.
- <sup>2)</sup> Diaphragm grade according to working pressure, flow medium, and working temperature.
- <sup>3)</sup> Net weights (without obligation).
- <sup>4)</sup> Only PN 10 to DIN 3359.
- <sup>5)</sup> Rubber-coated valves up to max. + 110 °C according to diaphragm grade.
- <sup>6)</sup> According EN 12266 and 1074
- <sup>7)</sup> Corresponding to former DIN description 0.7040 (GGG-40).
- <sup>8)</sup> According EN 558, FTF, basic serie 1

## ERHARD Diaphragm Valves, Weir Type “BG” straight pattern, to DIN 3359-B2 or B4<sup>4)</sup>

of ductile cast iron or rubber-coated ductile cast iron, with safety sealing device

**Range of application:** liquids and neutral gases

Size DN	Pressure rating PN	Hydrost. test pressure <sup>6)</sup> in bars for		Max. adm. working pressure in bars at a working temperature of up to max. + 120 °C <sup>5)</sup>
		body water	seat water	
15 - 150	10	17	11	10
200 - 250	6	12	6,6	6
300	4	6	4,4	4

When placing the order, please specify flow medium, working pressure, and working temperature. Specify if vacuum service is required.

**Flanges B**, DN 15 - 150, PN 16, GI, type 21, connecting dimensions and thickness to EN 1092-2<sup>2)</sup>.  
**B**, DN 200 - 300, connecting dimensions, PN 10, thickness, PN 6, GI, type 21, EN 1092-2.

### Materials/Equipment

Prod. No.	7300 0772	7300 1672
Body	Ductile cast iron EN-JS1030 <sup>7)</sup>	Ductile cast iron EN-JS1030 <sup>7)</sup> with hard-rubber coating
Bonnet	Ductile cast iron EN-JS1030 <sup>7)</sup>	Ductile cast iron EN-JS1030 <sup>7)</sup>
Diaphragm	Grade according to working conditions <sup>1)</sup>	Grade according to working conditions <sup>1)</sup>
Stem	Ferritic chrome steel	Ferritic chrome steel
Threaded bush	Brass	Brass
Connecting bolts	Steel	Steel
Handwheel	Cast iron	Cast iron
Corrosion protection	Prime coat: chlorine-free caoutchouc derivative with modified alkyd resin Additionally external: synthetic resin varnish, sky blue, RAL 5015	

### Features


Straight pattern, with safety sealing device, absolutely leaktight, with rising stem and non-rising handwheel. The valve is closed by turning the handwheel in clockwise direction. Diaphragm can be replaced without removing the valve from the pipeline.

### Dimensions

Size DN	Face-to-face dimension L <sup>8)</sup> mm	Height (approx.) H mm	Flange dia. D mm	Handwheel dia. d mm	Weight <sup>3)</sup> approx. kg
15	130	95	95	120	2,5
20	150	95	105	120	3,0
25	160	100	115	120	3,0
32	180	120	140	120	6,5
40	200	120	150	120	7,0
50	230	140	165	140	11
65	290	170	185	160	16
80	310	195	200	200	22
100	350	245	220	250	33
125	400	290	250	320	50
150	480	315	285	400	72
200	600	430	340	500	150
250	730	530	395	500	205
300	850	605	445	630	295

When Diaphragm Valves in hot water plants are subject to temperature changes at long intervals, the user has to reckon with slacking of the elastomer diaphragm where it is clamped between body and bonnet. Retensioning of the bonnet bolts could become necessary. If such plants are equipped with insulation against loss of heat, we recommend to install ERHARD ECLS Butterfly Valves.

**Warning note:** When using flow media endangering the environment and detrimental to health, pay attention to the relevant legal rules and regulations as well as to the regulations for prevention of accidents, AD prints, DVGW regulations, and similar. Moreover, valve design with safety sealing device, e. g. Prod. No. 7300 0772, has to be chosen for such media, so that the medium cannot penetrate to the outside when the diaphragm breaks.

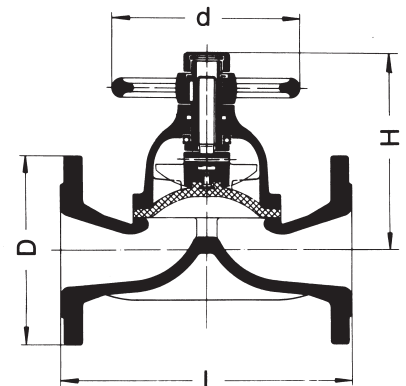

- <sup>1)</sup> Diaphragm grade according to working pressure, flow medium, and working temperature.
- <sup>2)</sup> For DN 80 please specify if the flanges are to be drilled with 4 or 8 holes.
- <sup>3)</sup> Net weights (without obligation).
- <sup>4)</sup> Only PN 10 to DIN 3359.
- <sup>5)</sup> Rubber-coated valves up to max. + 110°C according to diaphragm grade.
- <sup>6)</sup> According EN 12266 and 1074
- <sup>7)</sup> Corresponding to former DIN description 0.7040 (GGG-40).
- <sup>8)</sup> According EN 558, FTF, basic serie 1

## ERHARD Diaphragm Valves, Weir Type “BG” straight pattern, to DIN 3359-GE2

of ductile cast iron with screwed pipe connection and safety sealing device

**Range of application:** liquids and neutral gases

Size DN	Pressure rating PN	Hydrost. test pressure <sup>4)</sup> in bars for		Max. adm. working pressure in bars at a working temperature of max. + 120 °C <sup>5)</sup>
		body water	seat water	
8/10 - 50	10	17	11	10

When placing the order, please specify flow medium, working pressure, and working temperature. Specify if vacuum service is required.

**Connecting threads** according to DIN ISO 228.

### Materials/Equipment

Body	Ductile cast iron EN-JS1030 <sup>6)</sup>
Bonnet	Ductile cast iron EN-JS1030 <sup>6)</sup>
Diaphragm	Grade according to working conditions <sup>1)</sup>
Stem	Ferritic chrome steel
Threaded bush	Brass
Connecting bolts	Steel
Handwheel	Cast iron
Corrosion protection	Prime coat: chlorine-free caoutchouc derivative with modified alkyd resin. Additionally external: synthetic resin varnish, sky blue, RAL 5015

### Features

Straight pattern, with safety sealing device, absolutely leaktight, with rising stem and non-rising handwheel. The valve is closed by turning the handwheel in clockwise direction. Diaphragm can be replaced without removing the valve from the pipeline.

### Dimensions

Size DN	Connecting thread d <sub>1</sub>	Height (approx.) H mm	Face-to- face dim. L <sup>6)</sup> mm	Width across flats SW mm	Handwheel dia. d <sub>2</sub> mm	Weight <sup>2)</sup> approx. kg
8/10	G 3/8	85	85	32	80	1,0
15	G 1/2	85	85	32	80	1,0
20	G 3/4	95	100	41	120	1,5
25	G 1	105	115	46	120	2,0
32	G1 1/4	110	130	55	120	3,0
40	G1 1/2	130	150	65	120	4,0
50	G 2	145	180	75	140	6,0

<sup>1)</sup> Diaphragm grade according to working pressure, flow medium, and working temperature.

<sup>2)</sup> Net weights (without obligation).

<sup>3)</sup> Depending on diaphragm grade.


<sup>4)</sup> According EN 12266 and EN 1074.

<sup>5)</sup> Corresponding to former DIN description 0.7040 (GGG-40).

<sup>6)</sup> According DIN 3202 part 4, basic serie M2.

When Diaphragm Valves in hot water plants are subject to temperature changes at long intervals, the user has to reckon with slacking of the elastomer diaphragm where it is clamped between body and bonnet. Retensioning of the bonnet bolts could become necessary. If such plants are equipped with insulation against loss of heat, we recommend to install ERHARD ECLS Butterfly Valves.

**Warning note:** When using flow media endangering the environment and detrimental to health, pay attention to the relevant legal rules and regulations as well as to the regulations for prevention of accidents, AD prints, DVGW regulations, and similar. Moreover, valve design with safety sealing device, e. g. Prod. No. 7300 0772, has to be chosen for such media, so that the medium cannot penetrate to the outside when the diaphragm breaks.

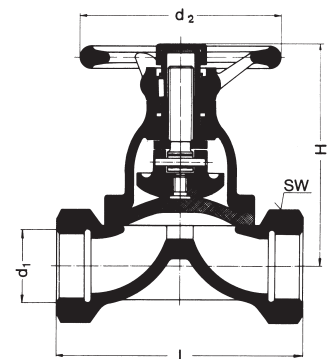





## По вопросам продажи и поддержки обращайтесь:

**Архангельск** (8182)63-90-72  
**Астана** (7172)727-132  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89  
**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Казань** (843)206-01-48

**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Липецк** (4742)52-20-81  
**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81

**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Пермь** (342)205-81-47  
**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54

**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Тверь** (4822)63-31-35  
**Томск** (3822)98-41-53  
**Тула** (4872)74-02-29  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Ярославль** (4852)69-52-93

**Киргизия** (996)312-96-26-47

**Казахстан** (772)734-952-31

**Таджикистан** (992)427-82-92-69

**Единый адрес для всех регионов:** [edf@nt-rt.ru](mailto:edf@nt-rt.ru) || [www.erhard.nt-rt.ru](http://www.erhard.nt-rt.ru)